



IFE-DWT-RO

Semi Rigid Heat Shrinkable Tubing
with Meltable Liner



IFE-DWT-RO has excellent mechanical strength, sealing property, chemical/ fluid resistance, insulation and is widely used for all kinds of automotive wire harness and cable protection.

Material Outer jacket: Cross-linked modified polyolefin

Inner wall: Modified hot melt adhesive.

ShrinkRatio: 4:1

Characteristics:

- Semi-rigid
- Flame-retardant
- Good mechanical, electric and chemical resistance
- Excellent sealing properties
- Operating temperature range: -40°C - 125°C
- Shrinking temperature: 100°C - 150°C
- Color: Black

www.ife-group.com



IFE Americas USA

7000 Kensington Road
Brighton, MI 48116-8334
Phone: +1 (248) 446-1900
E-mail: info@ife-group.com

IFE Americas México

Bernardo Quintana 7001 Torre 2 – 813
Col. Centro Sur. Querétaro, Qro. 76090
Phone: +52 (442) 245-1515
E-mail: info@ife-group.com

IFE Europe Sweden

Banérgatan 51
SE-115 22 Stockholm
Phone: +46 708 102 711
E-mail: info@ife-group.com

IFE-DWT-RO

Semi Rigid Heat Shrinkable Tubing with Meltable Liner




Specifications

Item	Test Method	Result
Longitudinal shrink ratio	ASTM D2671	-10~ 0%
Tensile strength	ASTM D2671	≥10.4 MPa
Elongation ratio at break	ASTM D2671	≥200 %
Low temperature flexibility	ASTM D2671	(-40±2°C, 4h±15min) No cracks in outer wall
Ageing in circulating-air oven	158±3°C, 168±2h	Completed
Tensile strength after ageing	ASTM D2671	≥7.3 MPa
Elongation ratio at break after ageing	ASTM D2671	≥100%
Dielectric strength	ASTM D2671	≥19.7 kv/mm
Flammability	ASTM D2671 (Method B)	Self-extinguishing within 60s
Volume resistance	ASTM D2671	≥1012 Ω.cm
Heat shock	ASTM D2671 (250°C/4h)	No dripping, cracking or melting of outer wall
Specific Gravity (outer wall only)	ASTM D 2671	1.35 maximum
Secant Modulus	ASTM D 882 Procedure A at 2% strain	225 MPa minimum
Concentricity		75% minimum
Copper Mirror Corrosion	ASTM D 2671 Procedure A 16 h at 121°C	No Corrosion

Standard sizes for IFE-DWT-RO (ShrinkRatio:4:1)

Size	As Supplied (mm)		After Recovery (mm)	
	Minimum Inside diameter(D)	Maximum Inside Diameter(d)	Maximum Inside Diameter(d)	Total Wall-thickness(W)
4.00	4.00	1.00	1.00	1.00
5.75	5.75	1.25	1.25	1.15
7.40	7.40	1.65	1.65	1.40
9.02	9.02	2.30	2.30	1.52
11.0	11.0	2.40	2.40	1.80
14.0	14.0	3.00	3.00	2.10
18.3	18.3	4.35	4.35	2.10

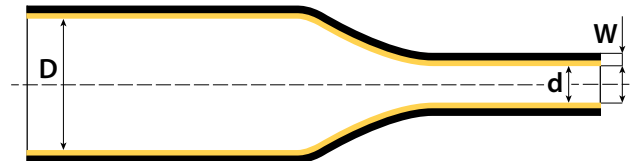

Note: Other dimensions and colors are also available according to customer requirements

Due to our program of continuous improvement, specifications may be subject to change.

www.ife-group.com



ISO 9001:2015

IFE Americas is a global provider of sealing and retaining solutions to meet customer needs. We offer a wide range of clamps, couplings, straps, and sleeves, with in-house testing facilities and technical support.



IFE Americas USA

7000 Kensington Road
Brighton, MI 48116-8334

Phone: +1 (248) 446-1900

E-mail: info@ife-group.com

IFE Americas México

Bernardo Quintana 7001 Torre 2 – 813
Col. Centro Sur. Querétaro, Qro. 76090

Phone: +52 (442) 245-1515

E-mail: info@ife-group.com

IFE Europe Sweden

Banératan 51
SE-115 22 Stockholm

Phone: +46 708 102 711

E-mail: info@ife-group.com